

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106


1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400

TEST REPORT

Client : Knotwood Pty Ltd
2/63 Burnside Road
Stapylton QLD 4207

Test Number : 23-004534
Issue Date : 19/12/2023
Print Date : 19/12/2023

Sample Description Clients Ref : "Knotwood Slip Resistant Decking"
Interlocking Aluminium Decking
Colour : Various
End Use : Decking
Nominal Composition : Aluminium with Sublimated, Slip resistant, Powder coat finish
Nominal Mass per Unit Area/Density : 9.69kg/m2
Nominal Thickness : 1.8mm

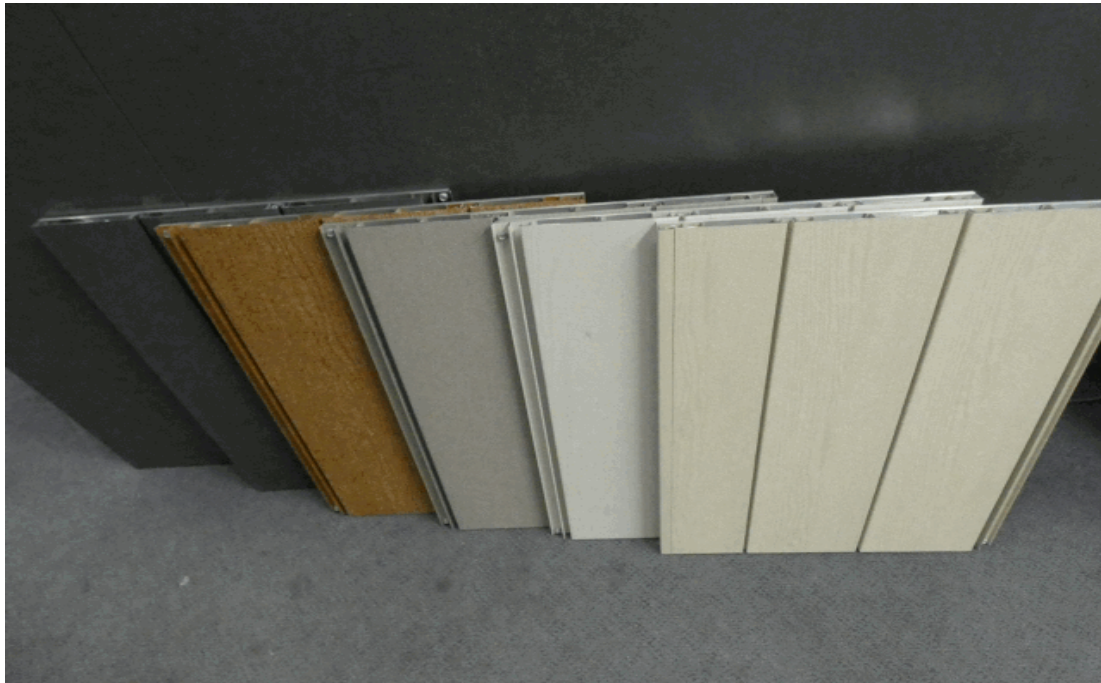

312243

67660

Page 1 of 2

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



Fiona McDonald

APPROVED SIGNATORY

MICHAEL A. JACKSON B.Sc.(Hons)
MANAGING DIRECTOR

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400

TEST REPORT

Client : Knotwood Pty Ltd
2/63 Burnside Road
Stapylton QLD 4207

Test Number : 23-004534
Issue Date : 19/12/2023
Print Date : 19/12/2023

AS/NZS 1530.3-1999

**Methods for Fire Tests on Building Materials, Components and Structures
Part 3: Simultaneous Determination of Ignitability,
Flame Propagation, Heat Release and Smoke Release**

Face tested:	Face		
Date tested:	18-12-2023		
	Standard Error	Mean	
Ignition time	0.48	8.09	min
Flame propagation time	Nil	Nil	sec
Heat release integral	1.4	18.9	kJ/m ²
Smoke release, log d	0.0994	-1.5892	
Optical density, d		0.0295	/ metre
Number of specimens ignited:		6	
Number of specimens tested:		6	
Regulatory Indices:			
Ignitability Index		12	Range 0-20
Spread of Flame Index		0	Range 0-10
Heat Evolved Index		0	Range 0-10
Smoke Developed Index		2	Range 0-10

Each test specimen had an unattached backing of 4.5mm thick fibre reinforced cement board.

Each test specimen was restrained on the exposed face by a layer of galvanised welded square mesh made from wire of nominal diameter 0.8mm and nominal spacing 12mm in both directions and the assembly clamped in four places.

These results only apply to the specimen mounted, as described in this report. The result of this fire test may be used to directly assess fire hazard, but it should be recognised that a single test method will not provide a full assessment of fire hazard under all fire conditions.

312243

67660

Page 2 of 2

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



Fiona McDonald

APPROVED SIGNATORY

MICHAEL A. JACKSON B.Sc.(Hons)
MANAGING DIRECTOR