

KNOTWOODTM

Quick Start Guide.

Panel Battens

Before Installation.

You might need the following tools.



Screws



Level




Measuring Tape




Rubber Mallet



Drop-Saw



Impact Driver/Drill



Clamp

Delivery Inspection.

- Check packs for freight damage on arrival.
- Report any damage to your Knotwood rep within 24 hours.

Unpacking.

- Cut nylon straps and remove the outer wrap.
- Check ends of the profiles and trim if required.
- Take care not to scratch the coated material during handling.

Cutting Tools.


- Compound mitre saw (Aluminium multi-tooth blade)

Fasteners.

- Use 304 or 316 grade stainless steel.
- In non-marine zone, hot-dip galvanised fasteners may be used.

Solution Profiles.

Starters.



Panels.


Compatible Profiles.





KEBP259M
Batten Panel - 1 Bracket - 25 x 9 mm (M)




KEBP1359M
Batten Panel - 3 Bracket - 25mm (M)

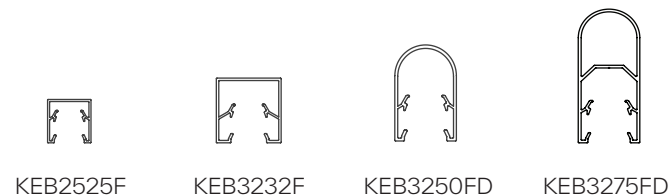

KEBP2525M
Batten Panel - 1 Bracket - 25 x 25mm (M)

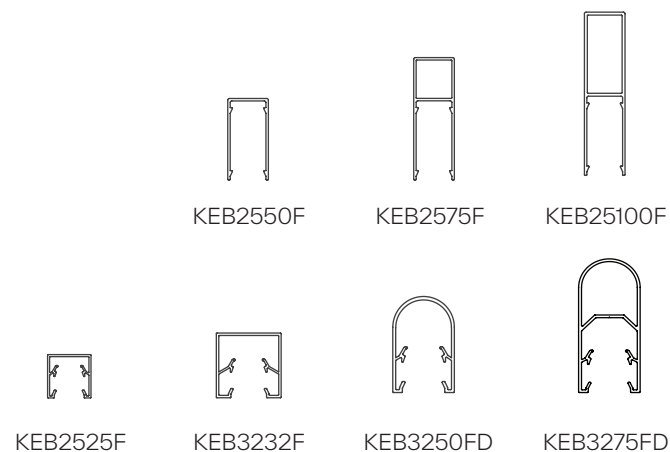

KEBP5050M
Batten Panel - 1 Bracket - 50mm (M)

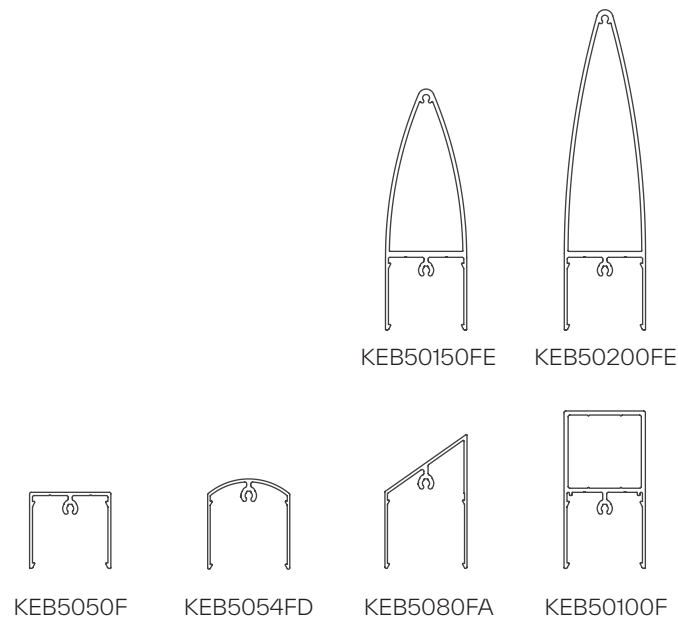


Installation.

Support Surface Preparation.

OPTION 1



OPTION 2

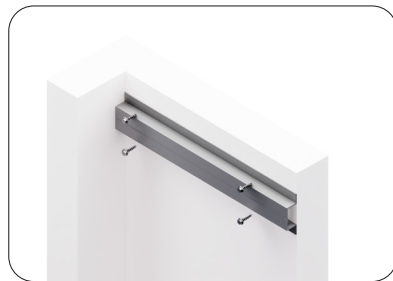

For optimal installation, we recommend that the support surface includes a substructure that assures the appropriate support and attachment of the panel battens solution. This may include; top hat section, metal hollow sections or timber sections.

Assembly Instructions.

Step 1.



FLAT



CORNER



Start by fixing the batten panel starter (KEBPS) on the initial corner of the selected surface. To extend the application around the corner, to the next wall, apply the 50mm angle (KEGA505016) instead of the batten panel starter (KEBPS).

Step 2.



Once the batten panel starter (KEBPS) is in place overlap the lead side of the first panel on top of it and fix it by screwing through both profiles.

Installation.

Assembly Instructions.

Step 3.




With the panel already in place, attach the batten of your choice by pressing them into the brackets until you hear a click. Rubber mallet may assist with batten install.

Step 4.



Once the first batten is securely fixed, proceed with the installation of the second panel. Overlap the leading edge of the second panel over the trailing edge of the first, ensuring proper alignment. Secure both panels by screwing through the overlapping profiles.

Step 5.

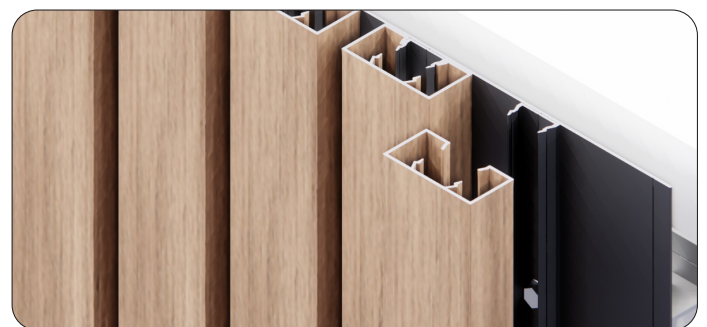

Repeat the process until all panels and brackets have been installed and the desired area is fully covered.

Installation.

Assembly Instructions.

Step 6.



In case the top or bottom ends of the battens are exposed, use the specific end caps designed for this solution. You can knock in the end caps or fix them in if your project deems it necessary.

OPTION 1



OPTION 2



KNOTWOOD™

KNOTWOOD AUS

sales@knotwood.com.au

1 300 566 896

7/63 Burnside Road,
Stapylton, QLD 4207 Australia

KNOTWOOD USA

sales@knotwood.com

+1 855 566 8966

5555 West Roosevelt Street Suite,
400 Phoenix, AZ 85043 United States

KNOTWOOD UK

sales@knotwood.co.uk

0800 131 3165

Unit 44, 45 Wolston Croft,
Northwich CW8 4DL, United Kingdom